

# OUTDOOR SPORTS FLOORING

## SPORTFLOOR-EX HARD COURT

Outdoor resilient, acrylic medium-hard sports flooring system ideal for tennis, basketball, volleyball, handball, football courts, as well as any other outdoor sports courts.

Combination of wet-pour acrylic coatings in total average thickness of 2.2mm.

**Classified system by the International Tennis Federation (I.T.F).**



### Steps:

**1. RITIVEX R LIQUID 1102 - Acrylic primer.**


Used as primer of acrylic coatings, such as **ELASTOSPORT 853** or **SUPER ELASTOCOAT 842**. Applied by airless sprayer or brush.

**2. ELASTOSPORT 853 - Acrylic, one component, smoothing and repairing wet-pour resurfacer for sports floors systems.**

Consists of acrylic resins, quartz sand and special improver. **ELASTOSPORT 853** is applied by squeegee on smooth compact asphalt to seal the porosity and smooth out the surface before the application of **ELASTOTURF 851**. Highly resistant to adverse weather conditions (snow, frost, heat waves etc.) after drying.

**3. ELASTOTURF 851 - Acrylic, elastic, slip-resistant, coating for sports floors systems.**

Consists of acrylic resins, quartz sand and special improver. It is combined with **ELASTOSPORT 853** as substrate to create multi-purpose sports flooring systems. Highly resistant to adverse weather conditions (snow, frost, heat waves etc.) after drying. Applied by squeegee.

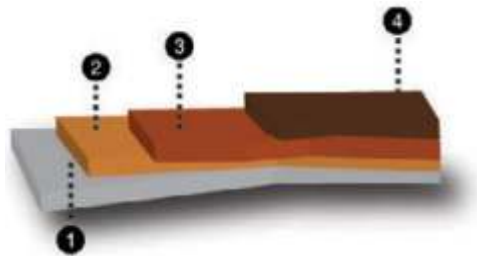

Description	Consumption
RITIVEX R LIQUID 1102 - Acrylic primer.	0.2-0.3kg/m <sup>2</sup> for 1 layer
ELASTOSPORT 853 - Acrylic, one component, smoothing and repairing wet-pour resurfacer for sports floors systems.	2kg/m <sup>2</sup> for 2 layers
ELASTOTURF 851 - Acrylic, elastic, slip-resistant, coating for sports floors systems.	1.5kg/m <sup>2</sup> for 3 layers